



VIGORPLUS+

VIGORPLUS DESIGN





V161

- 2" screen
- 1920 x 1080P Full HD@60fps
- Sony IMX307 Sensor
- 140° viewing angle
- F/1.6 aperture
- GPS / G sensor
- MicroSD cards up to 256GB
- Support Rear cam
- Battery : Super Capacitor



V163

- 2" screen
- 4K @30fps or 2K @60fps
- Sony IMX415 Sensor
- 140° viewing angle
- F/1.6 aperture
- GPS / G sensor
- MicroSD cards up to 256GB
- Support Rear Cam
- Battery : Super Capacitor



V16R

- 1920 x 1080P Full HD@30fps
- Sony IMX307 Sensor
- 155° viewing angle
- F/1.8 aperture



V262W

- 2" screen
- 2K @60fps
- Sony IMX335 Sensor
- 140° viewing angle
- F/1.6 aperture
- WIFI
- GPS / G sensor
- Digital Interface
- MicroSD cards up to 256GB
- Support Rear Cam
- Battery : Super Capacitor



V263W

- 2" screen
- 4K @30fps
- Sony IMX335 Sensor
- 140° viewing angle
- F/1.6 aperture
- WIFI
- GPS / G sensor
- Digital Interface
- MicroSD cards up to 256GB
- Support Rear Cam
- Battery : Super Capacitor



V26R

- 1920 x 1080P Full HD@30fps
- Sony IMX307 Sensor
- 155° viewing angle
- F/1.8 aperture
- Digital Interface



V363W

- 2.7" screen
- Sony IMX 678 STARVIS 2 Sensor
- Front : 4K @30fps
- Cabin : 1K @30fps
- Front : 155° viewing angle
- F/1.8 aperture"
- Inner : 155°viewing angle
- F1.8 aperture"
- WIFI
- GPS / G sensor
- Digital Interface(Ethernet)
- MicroSD cards up to 256GB
- Support Rear Cam



V36R

- 2K @30fps
- Sony IMX 675 STARVIS 2 Sensor
- 155° viewing angle
- F/1.6 aperture
- Digital Interface

4G AI (ADAS+DMS) DVR

- SOC: Sigmastar SSC308QE
- 4G DVR
- Front cam:1080p
- Front:135° viewing angle
- Rear cam :1080P
- Rear:140° viewing angle
- GPS
- WIFI
- Support Remote Wake-up



DMS

- SOC: Sigmastar SSC377D
- RAM: 128MB
- ROM: 128MB
- Camera FOV: D:100°,H:72°,V:51°
- GPS
- Built-in MIC
- Built-in Speaker
- WIFI (Optional)





V880S-2

- 2-Channel Camera
- 9.66" Touch Screen
- Sony IMX307 Sensor
- Front cam : 1080p@30fps (27.5fps option)
- Front : 124° viewing angle
- Rear cam : 1080P @25fps
- Rear : 124° viewing angle
- GPS
- Upside down function
- Micro SD card up to 128GB



K1

- 2-Channel Camera
- 9.66" Touch Screen
- Front cam : 2K@30fps, Sony IMX 335 Sensor
- Front : 139° viewing angle
- Rear cam : 1080P@30fps, Sony IMX 307 Sensor
- Rear : 126° viewing angle
- GPS
- MicroSD cards up to 256GB



ADAS E-mirror

- 2-Channel Camera
- 9.35" Touch Screen
- Front cam : 2K@30fps
- Front : 123°/ 133° viewing angle,(GC4653/Sony 335)
- Rear cam : 1080P @ 25fps
- Rear : 130°/ 138 ° viewing angle (MIS2031/Sony 307)
- GPS
- MicroSD cards up to 256GB
- ADAS :
FCW / LDW / PCW / Virtual Bumper
Stop & Go / RCW / LCA



CarPlay E-mirror

- 2-Channel Camera+ Carplay /
Android auto function
- 10.88" IPS Touch Screen
- Front cam : 1080P@30fps
- Front:136° viewing angle
- Rear cam : 1080P@25fps
- Rear:132° viewing angle
- G-sensor
- GPS(optional)
- MicroSD cards up to 256GB



Car Fragrance

- Innovative design
- Clips easily onto car air vent
- Neutralize unpleasant odors in car/vehicle
- Light Fragrance and stable performance
- Refills sold separately



CBG B101

- Zinc alloy body and Tungsten steel con for car window breaker
- Seat Belt Cutter for emergency escape from an incident
- Input Voltage : 12V ~ 24V
- Output Voltage : DC 5V
- MAX Output Current : 3.4A
- USB A + Type C (Total Output 38W)



CBG (3-in1)

- Aluminum alloy all-in-one tool
- USB Chager : USB Ax2 (2.4A)
- Car Window Breaker with seat belt cutter
- 2200mAh Power Bank
- Flashlight
- SOS light ; Normal light for tent




CCP P301

- 3 ports Car Charger
- USB - A QC 3.0 5V/3A, 9V/2A, 12V/1.5A, Max 18W
- USB - C Type C PD 5V/3A, 9V/2A, 12V/1.5A, Max 18W
- USB - A DC 5V/2.4A, Max 12W
- Support 12V/24V




Car Table

- 360° adjustable Car Table
- Built with a reinforced aluminum alloy base
- Easy to install, just put into cup holder

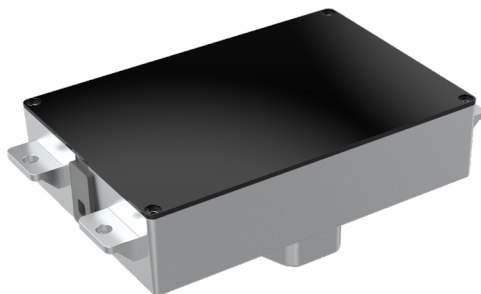

Smart Tracking Wireless Charger

- Input voltage : 9.0~16.0V
- Output power : 15W
- Charging efficiency : >75%
- Coil : 1 coil (Moving coil)
- Operating Temperature : -40 ~ + 85°C
- Working Frequency : EPP 110~205KHz/ MPP
- FOD Features : Compliant with Qi 2.0
- CAN Communication : Support
- EMC Standard: CISPR 25 : Class3

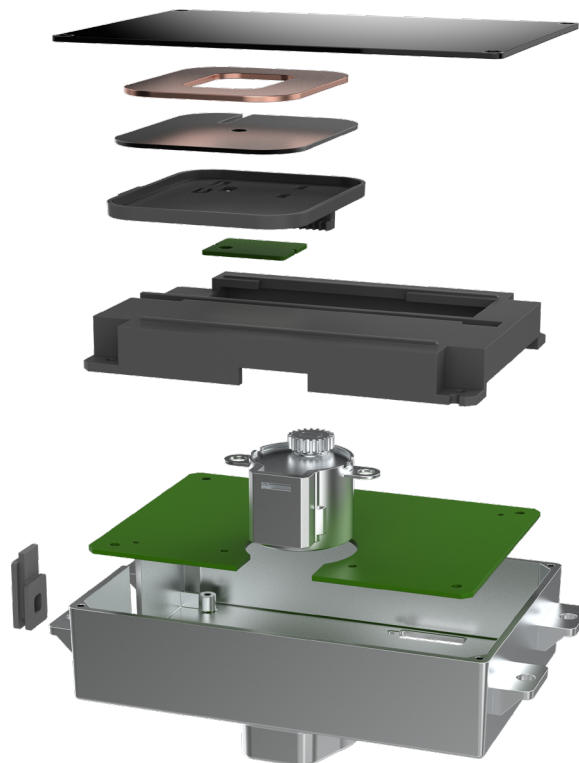

BSD (Blind Spot Detection)



- Dimension : 29.4mmx29.4mmx24.6mm
- Module inside : BSM module (4TX,4RX)
- Warning display monitor
- Vertical angle: 30°
- Horizontal angle: 120°
- Waterproof level : IP67
- Voltage : DC9-16V
- Consumption : <300mA@12V
- Sensor frequency : 77-81GHZ
- Transmitting Power : 11dbm (typical)
- Vertical angle : 30°
- Horizontal angle : 100°
- Detecting relative speed range : ± 200 km/h
- Detection response speed : 300ms
- Operation temperature : -40~+80°C
- Storage temperature: -40~+85°C


BSIS + MOIS Solution

Meet DVS 2024 requirement

Improve driver awareness of the dangers around

BSIS Rader

- 76~77Ghz Millimeter wave technology based
- Antenna Form : 4TX, 4RX
- Horizontal Angle : 180
- Vertical Angle : 20
- Speed Range(KM/H) : -144 ~ +144
- Detectability(meter) : 60 m
- Waterproof : IP67
- Operation temperature : -40~+85°C
- Storage temperature : -40~+95°C

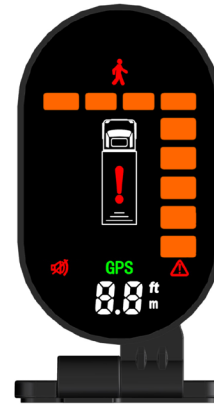

MOIS Rader

- 77Ghz Millimeter wave technology based
- Antenna Form : 2TX, 4RX
- Horizontal Angle : 140
- Vertical Angle : 20
- Speed Range(KM/H) : -200 ~ +200
- Detectability(meter) : 70 m
- Waterproof : IP67
- Operation temperature : -40~+85°C
- Storage temperature : -40~+95°C

Monster 3 – Phone Mount

- Anti-Shake & Vibration Damping
- Click and Go
- Durable and stable
- Equipped with Anti-shock pad
- Wide Compatibility : Applicable mobile phone size 5~6.7 inches (144-170mm)
- Easy to adjust to a horizontal or vertical screen
- Options for installation : Rear mirror mounting or handlebar mounting





DESIGN
AWARD
2021



GOLD
PIN
DESIGN
AWARD



HIVE BSM

- Dimension : 121.6mmx56.5mmx45.3mm
- Module inside : BSM module(1TX,2RX) x 2
- Power LED on warning display
- Waterproof : IP67
- Voltage : DC9-16V
- Consumption : < 500mA@12V
- Sensor frequency : 24.00-24.25Ghz
- Transmitting Power : 11dbm(typical)
- Operation temperature : -40~+80°C
- Storage temperature: -40~+85°C



24 GHz NB millimeter-wave
radar 2 in 1 Detection range = 70°



BSM (77G)

- Dimension : 29.4mm x 29.4mm x 24.6mm
- Module inside : BSM module(4TX,4RX)
- Warning display monitor
- Vertical angle: 30°
- Horizontal angle: 120°
- Waterproof : IP67
- BSD and LCA function
- Sensor frequency : 77Ghz
- Operation temperature : -40~+80°C
- Storage temperature: -40~+85°C





High-End Display System

- 5" (1024x600) Touch panel(1000 nits)
- Front and Rear Image Sensor: 2M pixel
- 1920*1080P Full HD@30fps
- F/1.8 aperture
- Support CarPlay, Android Auto, HiCar
- 360° rotatable lens, adjustable angle
- Rain Mode (locks screen)
- Waterproof: IP67
- Bluetooth: 4.2
- WIFI 2.4+5GHz
- Operation temperature: -20~+70°C



SPIN - DVR

- 3"screen
- Sony IMX335 Sensor
- Front cam : 2K@30fps
- Rear cam : 2K@30fps
- WIFI
- Built-in GPS
- Motion Detection
- Waterproof : IP67
- MicroSD cards up to 256GB
- Operation temperature: -10~+60°C
- Storage temperature: -20~+70°C

VIGORPLUS+



7F., No.300, Yangguang St., Neihu Dist., Taipei City 114, Taiwan

☎ +886-2-5582-1818 📠 +886-2-5582-0098

Mail : salesnb@jet-opto.com.tw

<https://www.jet-opto.com.tw/en/>

<https://www.vigorplus.com.tw/en/>

